


EnduroHL Primed

Not to scale

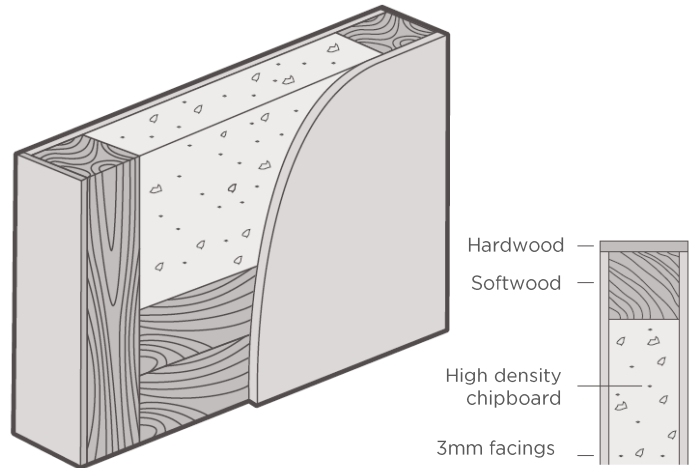

Specification

This door is manufactured with a solid core and a softwood frame to all 4 sides with hardwood lipping on the vertical edges and the door face is primed for on-site painting

- High density solid chipboard core
- 37mm Softwood stiles and rails on all 4 sides
- 3mm MDF primed face
- 6mm Hardwood lippings to the two long edges
- 44mm overall thickness
- Standard sizes

Performance

- NFR or FD30
- Tested to DD171 and classed as severe duty
- 31dB acoustic rated (with the correct frame seal arrangement)

Finish Options

- Primed for on-site painting

Suitable for...

- ✓ Internal Apartment
- ✓ Communal/ Circulation
- ✓ Risers

FSC Certified

Sustainably sourced & carefully produced to design specification

Packaging

Protective packaging and delivered in palletised form (varies per order)

